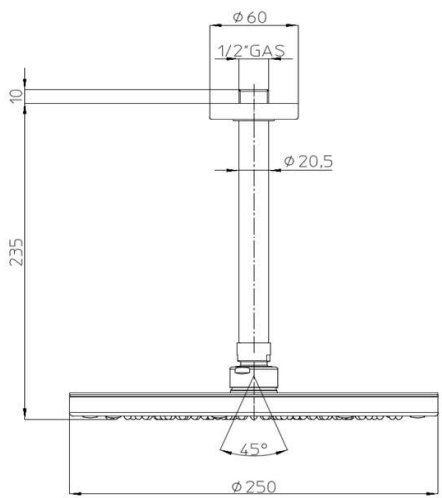
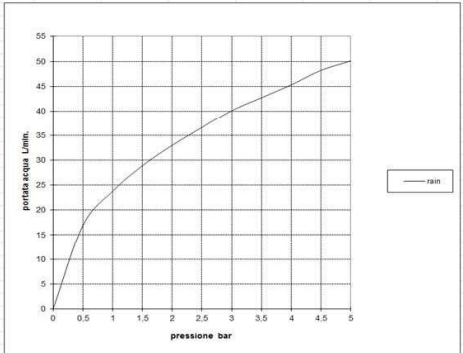


 BOSSINI	SCHEDA TECNICA TECHNICAL SHEET	Date: 29/01/2014 Rev/0																										
Codice / Code: H31410	Descrizione / description: SOFFIONE OKI 250mm CON BRACCIO VERTICALE DIAMETRO 21mm 1/2" MM OKI SHOWER HEAD 250mm, WITH CEILING SHOWER ARM DIAMETER 21mm 1/2"MM																											
Foto / image 	Disegni / drawings 																											
Grafico di portata / Flow rate diagram  <table border="1" data-bbox="987 842 1268 1213"> <thead> <tr> <th></th> <th>rain</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td></tr> <tr><td>0,5</td><td>16,9</td></tr> <tr><td>1</td><td>23,8</td></tr> <tr><td>1,5</td><td>28,9</td></tr> <tr><td>2</td><td>33</td></tr> <tr><td>2,5</td><td>36,6</td></tr> <tr><td>3</td><td>40,1</td></tr> <tr><td>3,5</td><td>42,7</td></tr> <tr><td>4</td><td>45,3</td></tr> <tr><td>4,5</td><td>48,2</td></tr> <tr><td>5</td><td>50,1</td></tr> <tr> <td>pressione bar</td> <td>portata L/min</td> </tr> </tbody> </table>				rain	0	0	0,5	16,9	1	23,8	1,5	28,9	2	33	2,5	36,6	3	40,1	3,5	42,7	4	45,3	4,5	48,2	5	50,1	pressione bar	portata L/min
	rain																											
0	0																											
0,5	16,9																											
1	23,8																											
1,5	28,9																											
2	33																											
2,5	36,6																											
3	40,1																											
3,5	42,7																											
4	45,3																											
4,5	48,2																											
5	50,1																											
pressione bar	portata L/min																											
MATERIALI / materials BRASS																												
CARATTERISTICHE IDRAULICHE / hydraulic features <table border="1" style="width: 100%;"> <tr> <td></td> <td>pressione pressure</td> <td>portata flow rate</td> <td>temperatura temperature</td> <td colspan="2">solo per miscelatori termostatici only for thermostatic mixers</td> </tr> <tr> <td>min</td> <td>1 bar</td> <td>L/min</td> <td>--</td> <td>Blocco di sicurezza safety lock</td> <td>/</td> </tr> <tr> <td>max</td> <td>5 bar</td> <td>L/min</td> <td><70°C</td> <td>Temperatura acqua fredda cold water temperature</td> <td>/</td> </tr> <tr> <td>consigliata recommended</td> <td>2-3 bar</td> <td>L/min</td> <td>°C</td> <td>Temperatura acqua calda hot water temperature</td> <td>/</td> </tr> </table>				pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers		min	1 bar	L/min	--	Blocco di sicurezza safety lock	/	max	5 bar	L/min	<70°C	Temperatura acqua fredda cold water temperature	/	consigliata recommended	2-3 bar	L/min	°C	Temperatura acqua calda hot water temperature	/		
	pressione pressure	portata flow rate	temperatura temperature	solo per miscelatori termostatici only for thermostatic mixers																								
min	1 bar	L/min	--	Blocco di sicurezza safety lock	/																							
max	5 bar	L/min	<70°C	Temperatura acqua fredda cold water temperature	/																							
consigliata recommended	2-3 bar	L/min	°C	Temperatura acqua calda hot water temperature	/																							
CERTIFICAZIONI / CERTIFICATIONS: Soffione/Shower Head OKI Ø250mm: ACS, IAPMO, CSA, Watermark e WELS Australia																												
CONFORMITA' / CONFORMITY .																												